
Measure your door

Bespoke oak door measuring sheet

1. **Door only, or door and frame?** If the lining is sound, measure inside it. For a bare doorway, also measure the wall thickness for a lining set.
2. **Width:** measure inside the lining at the top, middle and bottom. Use the **smallest** figure.
3. **Height:** measure from the **finished floor** to the underside of the head on the left, middle and right. Use the **smallest** figure.
4. **Square and plumb:** check each side and the head with a spirit level, then measure both diagonals. Note any difference for your fitter.
5. **Wall thickness:** if ordering a frame, measure the full wall including plaster on both sides.
6. **Handing:** stand on the side the door opens towards and note which side the hinges are on.
7. **Configure:** standard UK height is 1981 mm, or choose 1800–2400 mm. Custom widths of 500–950 mm are available on single doors.

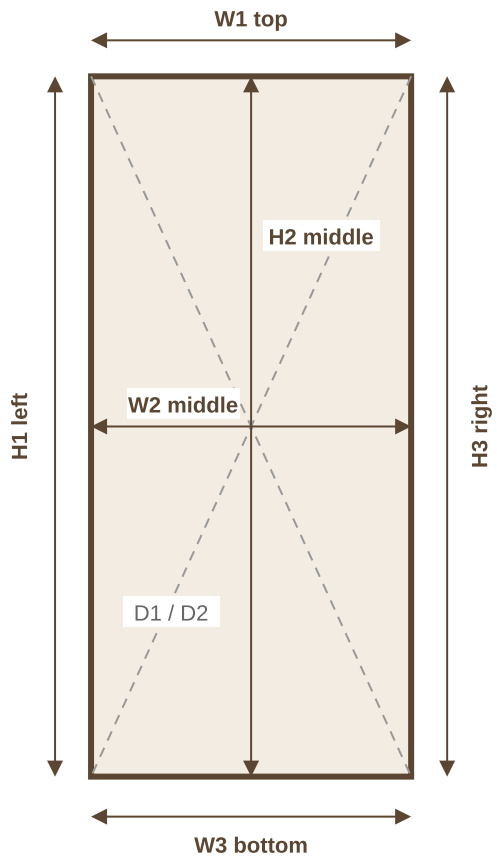

Width (mm) – top / middle / bottom

Height (mm) – left / middle / right

Diagonals (mm) – D1 / D2

Wall or lining depth (mm)

Handing

☐ Left ☐ Right

Style

☐ Ledged ☐ Ledged and Braced ☐ Framed and Ledged
☐ Framed, Ledged and Braced ☐ Panel ☐ Stable

Timber

Thickness / range

Notes (location, floor finish, frame condition)